

THE SKOOTSTOR HIGHLINE MOBILITY SCOOTER, BIKE AND GARDEN EQUIPMENT STORAGE FULFILS THE HIGHEST STANDARDS AND ALL YOUR NEEDS

The ultimate storage unit, which meets all the requirements in every respect for safety and functionality.

Solar panels for charging your mobility scooter or bike are an additional option



Hand-pressed from high-specification materials and backed by an amazing 20-year guarantee, the HighLine shed is a strong, stylish and secure.

Constructed from high-tensile, hot-dipped, zinc and polyamide-coated galvanised steel plate, this heavy-duty storage shed is as tough as they come. The flat roof is made from exactly the same super-strength material and has an exceptionally high snowload capacity, ensuring outstanding year-round weatherproof protection for all stored items. The integrated roof guttering includes handy leaf traps and offers a free and sustainable source of water for plants.

Entry is gained via a single or double door, which is fitted with a secure 3-way locking mechanism, including a cylinder lock and 2 keys, so any valuables will be completely safe from unwanted attention. This door also boasts a gas-assisted spring damper to prevent accidental slamming.

Advantages

- **Security:** 3-way locking mechanism with stainless steel door handle, standard cylinder and spare key
- The door is designed to be extremely robust and can be fitted into any of the walls from size H2 onwards! Door hinge: DIN right.
- All-round acrylic skylight provides sufficient light inside from all sides
- **Functionality:** gutter with integrated leaf traps fitted to both sides
- **Top quality materials:** hot-dipped galvanized, polyamide coated steel plate, screws and hinges made of stainless steel
- **Extremely stable:** withstands snow loads of up to 150 kg/m² storm proof (150 km/h, wind force 12)
- lifelong maintenance-free

We are part of the Low Carbon Exchange Group of Companies

Tel: 0345 457 3434

Email: info@skootstor.com

www.skootstor.com

- 20-year guarantee
- Single door with gas-assisted spring damper

Colours & Sizes

The interior of our HighLine is always coloured grey-white and the roof surface is always finished in metallic quartz-grey.



Metallic Silver



Metallic Quartz Grey



Metallic Dark Grey

(In cm. Exterior dimensions incl. roof overhang)


6 sizes:

- HS: 155 x 275 cm
- H1: 275 x 155 cm
- H2: 275 x 195 cm
- H3: 275 x 235 cm
- H4: 275 x 275 cm
- H5: 275 x 315 cm

(Exterior dimensions incl. roof overhang)


Door opening: standard door (hinge position right): 76 x 182 cm (W x H), double door: 155 x 182 cm (W x H)

The blue bar markings on the gutters are there to indicate onto which side (from size H2 onwards) the optional side canopy can be attached. The dotted lines mark the roof overhang.

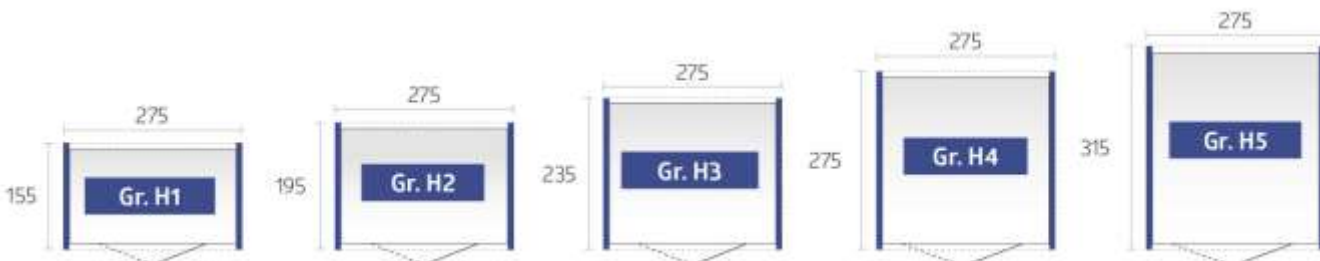

HINT: you can rotate the HighLine (from size H2 onwards) to suit your own preferences and the standard door can be installed in any side wall.

From size H4 on, installing the double doors in the side wall is also possible.

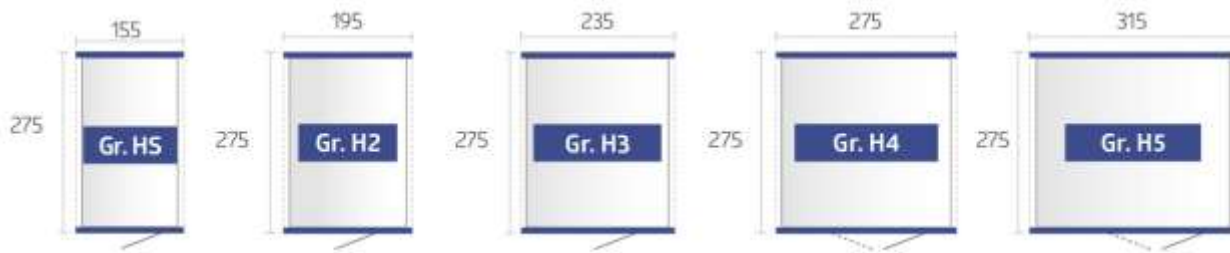

Technical Details

Data sheet
HighLine with Standard door


Size	Exterior dimensions* W x L x H (cm)	Interior dimensions W x L x H (cm)	Foundation dimensions W x L (cm)	Weight (kg)
HS	155 x 275 x 222**	132 x 252 x 210	137 x 257	176
H1	275 x 155 x 222**	252 x 132 x 210	257 x 137	176
H2	275 x 195 x 222**	252 x 172 x 210	257 x 177	202
H3	275 x 235 x 222**	252 x 212 x 210	257 x 217	228
H4	275 x 275 x 222**	252 x 252 x 210	257 x 257	251
H5	275 x 315 x 222**	252 x 292 x 210	257 x 297	280

HighLine with Double Door


Size	Exterior dimensions* W x L x H (cm)	Interior dimensions W x L x H (cm)	Foundation dimensions W x L (cm)	Weight (kg)
H1	275 x 155 x 222**	252 x 132 x 210	257 x 137	186
H2	275 x 195 x 222**	252 x 172 x 210	257 x 177	212
H3	275 x 235 x 222**	252 x 212 x 210	257 x 217	237
H4	275 x 275 x 222**	252 x 252 x 210	257 x 257	261
H5	275 x 315 x 222**	252 x 292 x 210	257 x 297	290

* incl. roof overhang ** highest point

Detailed dimensions of Skootstor HighLine and side canopy

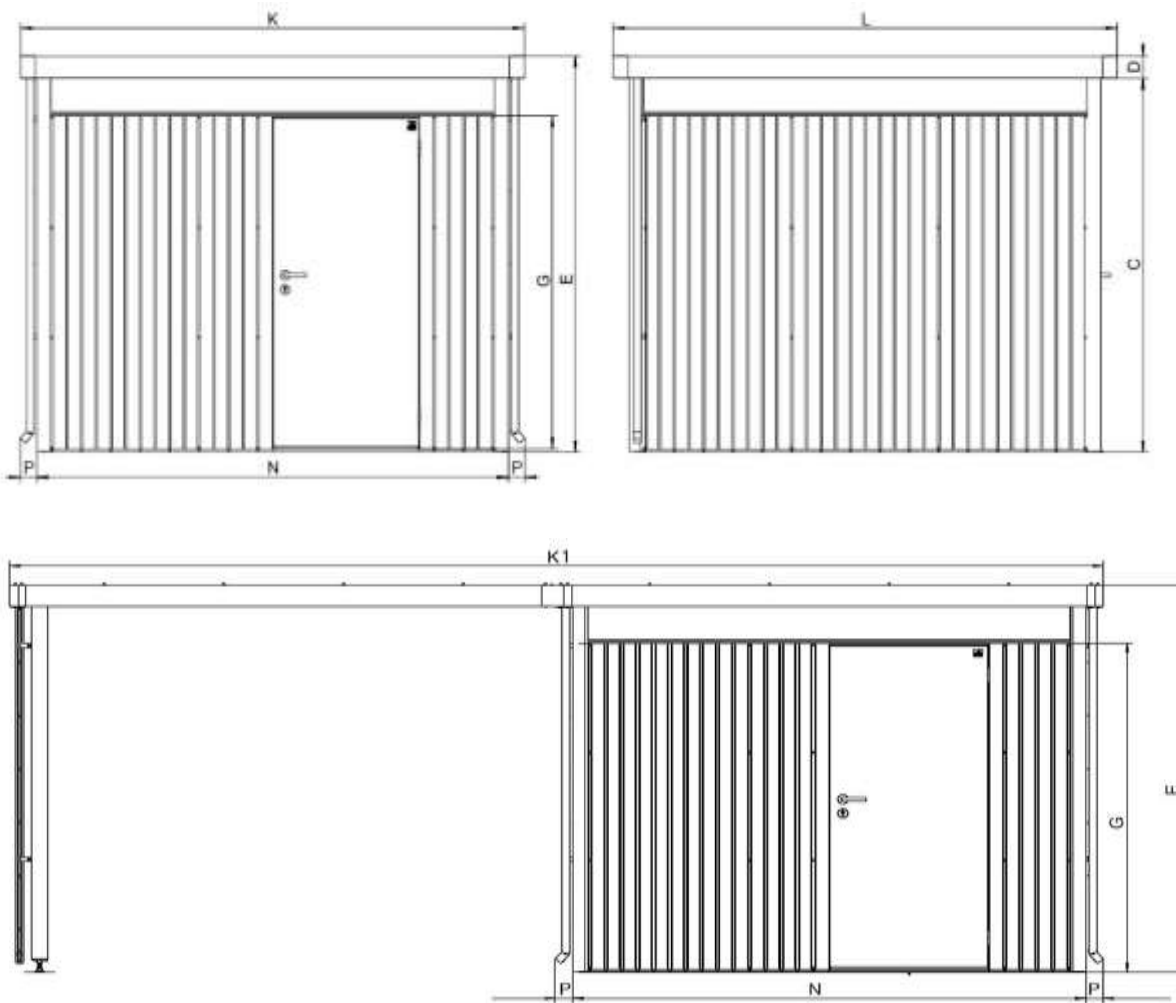

HighLine with side canopy

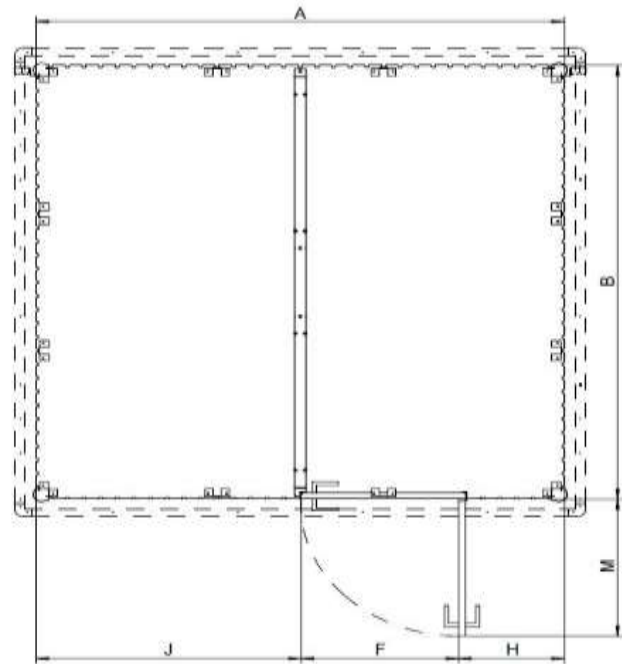

The letters A-P in the table below refer to the dimensions in the drawing above.

Description		Size HS(mm)	Size H1 (mm)	Size H2 (mm)
Highline width (excl. roof overhang)	A	1340	2540	2540
Highline length (excl. roof overhang)	B	2540	1340	1740
Highline height to underside roof surround	C	2095	2095	2095
Height roof surround	D	125	125	125
Total height of Highline	E	2220	2220	2220
Clearance width	F	760	760	760
Clearance width (optional 2nd door wing)	F	--	(1560)	(1560)
Clearance height	G	1820	1820	1820
Side wall width - right	H	310	510	510

Description		Size HS(mm)	Size H1 (mm)	Size H2 (mm)
Side wall width - left	J	270	1270	1270
Roof width	K	1550	2750	2750
Roof width with side canopy	K1	--	--	5480
Roof length	L	2750	1550	1950
Space required for opening door	M	800	800	800
Highline width incl. corner profiles (excl. roof overhang)	N	2570	2570	2570
Space required for rainwater pipes incl. elbow (optional)	P	90	90	90

Description		Size H3 (mm)	Size H4 (mm)	Size H5 (mm)
Highline width (excl. roof overhang)	A	2540	2540	2540
Highline length (excl. roof overhang)	B	2140	2540	2940
Highline height to underside roof surround	C	2095	2095	2095
Height roof surround	D	125	125	125
Total height of Highline	E	2220	2220	2220
Clearance width	F	760	760	760
Clearance width (optional 2nd door wing)	F	(1560)	(1560)	(1560)

We are part of the Low Carbon Exchange Group of Companies

Description		Size H3 (mm)	Size H4 (mm)	Size H5 (mm)
Clearance height	G	1820	1820	1820
Side wall width - right	H	510	510	510
Side wall width - left	J	1270	1270	1270
Roof width	K	2750	2750	2750
Roof width with side canopy	K1	5480	5480	5480
Roof length	L	2350	2750	3150
Space required for opening door	M	800	800	800
Highline width incl. corner profiles (excl. roof overhang)	N	2570	2570	2570
Space required for rainwater pipes incl. elbow (optional)	P	90	90	90